Apply Kiosk Profiles

Last Modified on 2026-07-22

View Applied Profiles

The Applied Profile Status Tool shows profiles already applied to a device or device collection.

To view the profiles applied to a device or device collection:

1. In your Configuration Manager console, right-click on a device or device collection.

2. Navigate to **Kiosk Manager** > **Applied Profile Status**.

Apply a Kiosk Profile

The Apply Profile dialog allows users to select an existing kiosk profile for deployment.

To apply a profile to a device:


1. In your Configuration Manager console, right-click on a device or device collection.

2. Navigate to **Kiosk Manager** > **Apply Profile**.

3. Select the profile to apply and click **Next**.

4. Choose to **Deploy Immediately** or to **Schedule Deployment**.

5. If you are scheduling the deployment, enter a **Task Name** and select a **Start Date** (required) then add an optional **End Date** or **Repeat Interval**.

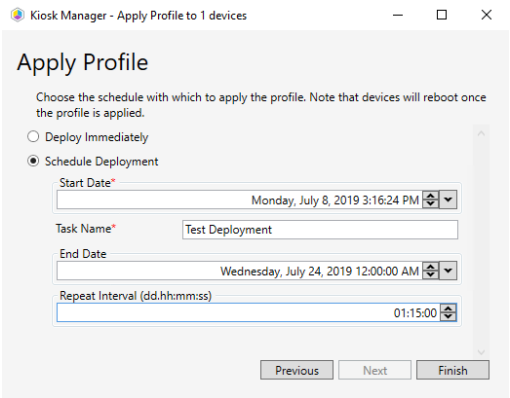

NOTE: Scheduled actions require Recast Management Server with Recast Proxy.

6. Click **Finish**.

When Recast Agents are deployed to devices with a kiosk profile, the Agent automatically downloads all Recast licenses from your Recast Management Server, including licenses specific to Kiosk Manager. Using Recast Agents

bypasses the need to reapply kiosk profiles to all devices upon license renewal.

Remove a Kiosk Profile From a Device

Removing a kiosk profile stops it from being applied to a device. This function does not delete the profile. You can choose to immediately remove a deployed profile or schedule a removal date.


To remove a profile from a device:

1. In your Configuration Manager console, right-click on a device or device collection.

2. Navigate to **Kiosk Manager** > **Remove Profiles** .

3. Select the profile to remove and click **Next**.

4. Choose to **Remove Immediately** or to **Schedule Removal**.

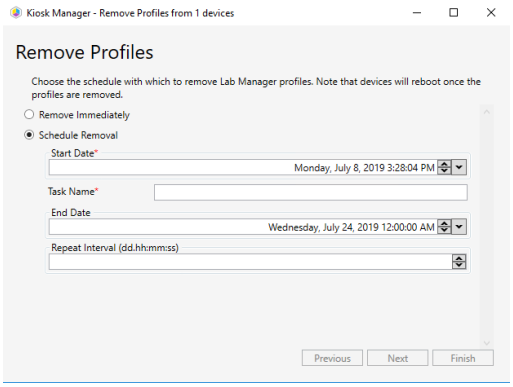

NOTE: Scheduled actions require Recast Management Server with Recast Proxy.

5. Click **Finish**.