


Edit Client Settings


Last Modified on 10.16.23

To edit client settings for a target group:

1. On the **Target Groups** page, click the Settings icon (cogs) to the left of a target group.

Target Groups

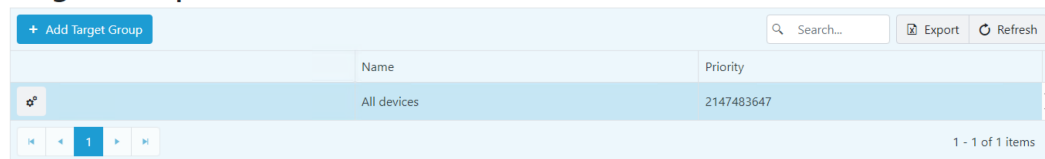

+ Add Target Group			Search...	Export	Refresh
	Name	Priority			
	All devices	2147483647			
1			1 - 1 of 1 items		

2. In the **Edit Client Settings** panel that opens, edit General settings, Credential Provider settings, and/or Local Password settings. After making any changes, click **Save** to update your client settings.

General Settings

- **Update settings interval:** Sets how frequently the agent attempts to connect to the Agent Gateway to check for new rules. Default interval is 60 minutes.
- **Allowed time tolerance:** Determines the maximum time difference allowed between the Recast Management Server and the agent before activation fails. Default time tolerance is 10 minutes.
- **Manage hybrid devices from Azure Active Directory:** Determines whether hybrid joined devices — meaning those joined to both on-premises and Azure Active Directory domains at the same time — will read Privilege Manager configuration targeted to an on-prem AD or Azure AD device object. By default, hybrid devices read PM configuration targeted to an on-prem AD device object.
- **Allow processing cached rules in offline:** Allows the agent to use rules stored in the local registry if it cannot connect to the Agent Gateway. Enabled by default.
- **Allow processing cached rules after update error :** Allows the agent to use rules stored in the local registry if the Agent Gateway returns a failure or invalid rules. Enabled by default.
- **Require reason category in temporary elevation:** When enabled, requires the end user to choose a pre-set reason category for temporary privilege elevation in the Credential Provider on the login screen and/or in the User Account Control window. Enabling this setting also requires those in a Service Desk (or similar) role to choose a reason category when [generating activation codes](#) for end users. Disabled by default.

In the **Edit Client Settings** panel, you can customize the reason categories displayed in the drop-down list by editing, deleting and/or reordering existing category names. You can also click **Add Reason** to enter an additional category.

Default Categories: Application installation, OS configuration change, Device installation, Security concerns, Troubleshooting

Credential Provider Settings

- **Usage scenario:**
 - Allow 'Use activation code' method

- Allow 'Run with Local Account' method
- Allow 'Run with Domain Account' method
- **Default method:** Default method is to 'Run with Local Account'
- **Timeout:** Default is 30 seconds

Local Password Settings

- **Characters** allowed in passwords
- **Length** of password: Default is 16 characters
- **Re-Generate Interval:** Default is to re-generate passwords every 7 days

After making any changes, click **Save** to update your client settings.
