

Send Unsent State Messages — Client Action on Collection


Last Modified on 12.22.25

The **Send Unsent State Messages** tool sends state messages cached on the ConfigMgr client to the ConfigMgr server.

To run the tool:

1. Right-click on a device collection.
2. Select **Right Click Tools > Client Actions on Collection > Send Unsent State Messages**.

The window that opens displays progress and completion according to success.

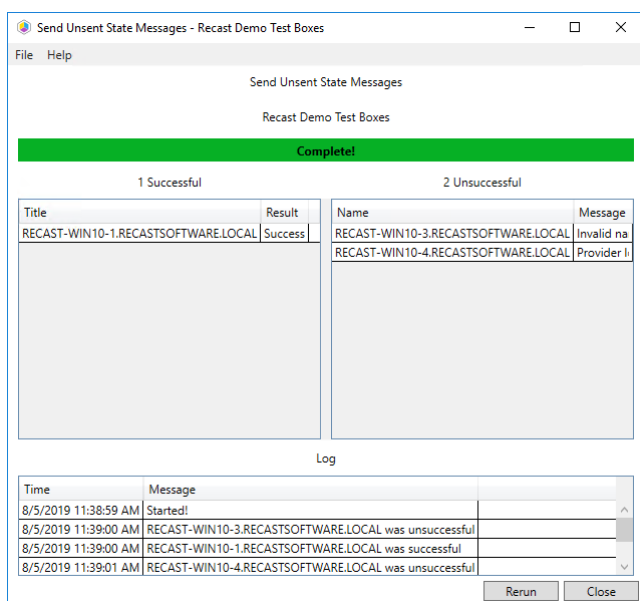

Recast Permissions

Plugin	Permissions
ConfigMgrClient	SendUnsentStateMessages

Microsoft Permissions

- Requires that the target device has a working ConfigMgr client installed.
- Requires that the user running the ConfigMgr console has administrative access to the remote device.
- [Remote WMI](#) ports must be allowed through the firewall.
- If the 'Ping Computer Before Running Tools' option is set, [ICMP Echo](#) must be allowed through the firewall.
- If using a Recast Management Server with a proxy, the service account will need administrator permissions on the remote device.

One way around some of the permissions requirements and firewall rules is installing [aRecast Agent](#).