

Client Actions on Collection: Send Unsent State Messages


This tool sends State Messages that are cached on the ConfigMgr client to the ConfigMgr server.

How it does it

This tool completes this action by using remote WMI.


Navigation

Navigate to the Send Unsent State Messages Tool by right clicking on a device, selecting Recast RCT > Client Actions on Collection > Sent Unsent State Messages:

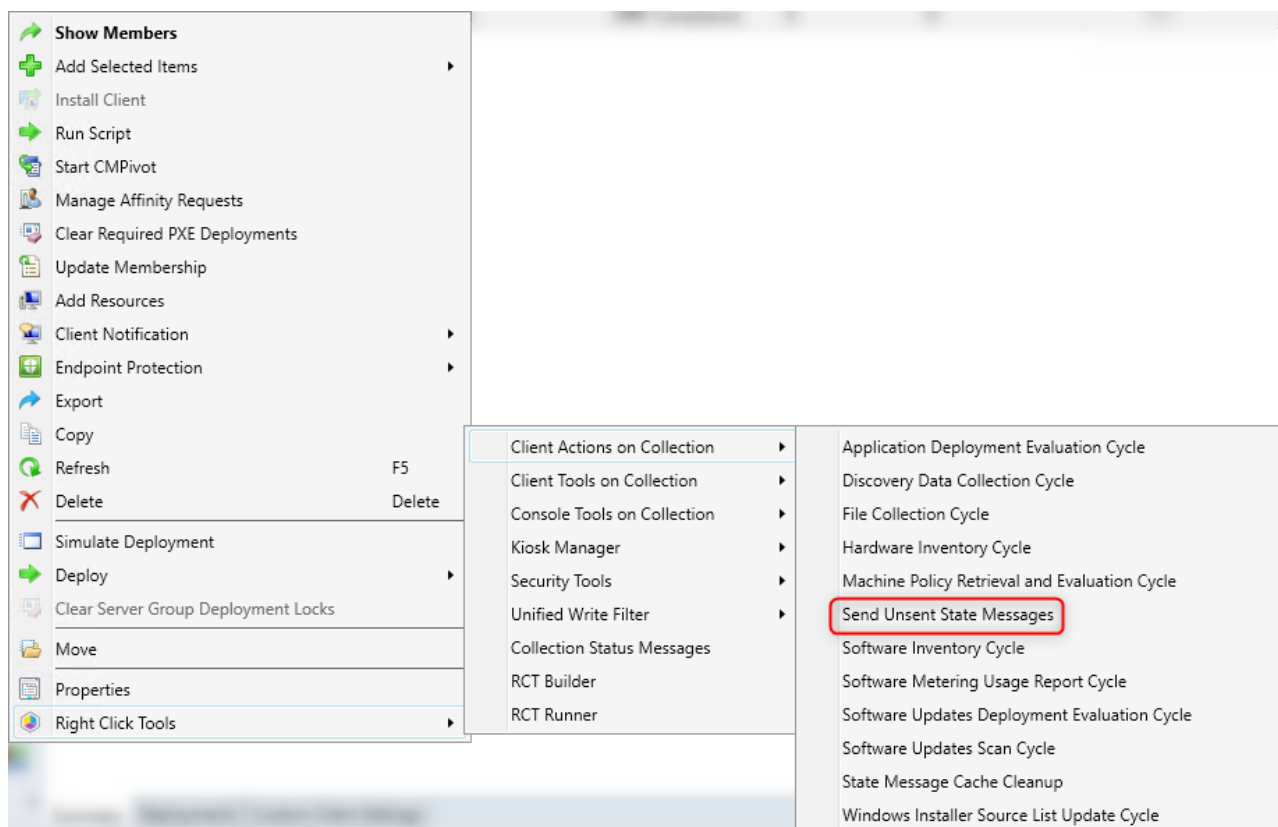

Screenshot

When the action is run, the following dialog box will open:

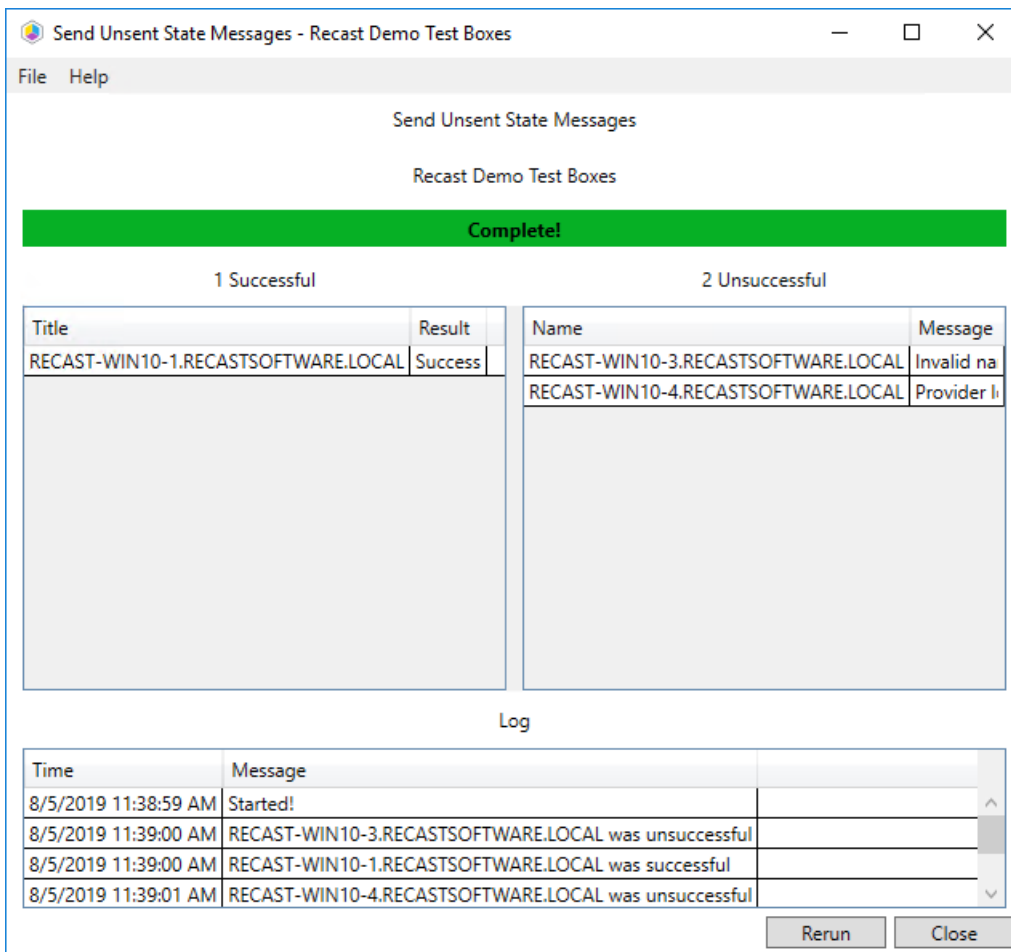

Recast Permissions

- Requires the Send Unsent State Messages permission in the ConfigMgr Client plugin.

Microsoft Permissions

- This action requires that the device you're targeting has a working ConfigMgr client installed. Additionally, the user running the ConfigMgr console will need to have administrator access to the remote device (if using Recast RCT Community or a Recast Server in impersonation mode), and the remote WMI ports will need to be allowed through the firewall. If the "Ping Computer Before Running Tools" option is set, ICMP Echo will also need to be allowed through the firewall. If using a Recast Server with a service account, the service account will need administrator permissions on the remote device.