

State Message Cache Cleanup — Client Action on Collection

Last Modified on 12.22.25


The **State Message Cache Cleanup** clears state messages that are cached on the ConfigMgr Client.

This action can be run on device collections, or using a [similar tool](#) designed for single and multi-selected devices

To run this tool:

1. Right-click on a device collection.
2. Select **Right Click Tools > Client Actions on Collection > State Message Cache Cleanup**.

The window that opens displays progress and successful completion.

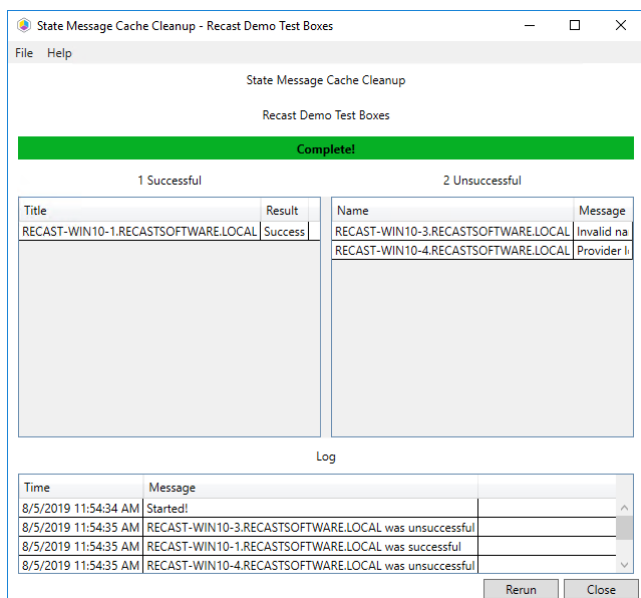

Recast Permissions

| Plugin | Permissions |
|-----------------|--------------------------|
| ConfigMgrClient | StateMessageCacheCleanup |

Microsoft Permissions

- Requires that the target device has a working ConfigMgr client installed.
- Requires that the user running the ConfigMgr console has administrative access to the remote device.
- [Remote WMI](#) ports must be allowed through the firewall.
- If the 'Ping Computer Before Running Tools' option is set, [ICMP Echo](#) must be allowed through the firewall.
- If using a Recast Management Server with a proxy, the service account will need administrator permissions on the remote device.

One way around some of the permissions requirements and firewall rules is installing a [Recast Agent](#).

