

Citrix StoreFront Connector


Last Modified on 2026-06-30

The Citrix StoreFront connector allows you to establish a connection to a Citrix StoreFront environment and import StoreFront applications and desktops as ready to use applications within Application Workspace for distribution.

Create a Citrix StoreFront Connector

To create a new Citrix StoreFront connector:

1. On the **Connectors** page, click the **Create** button.

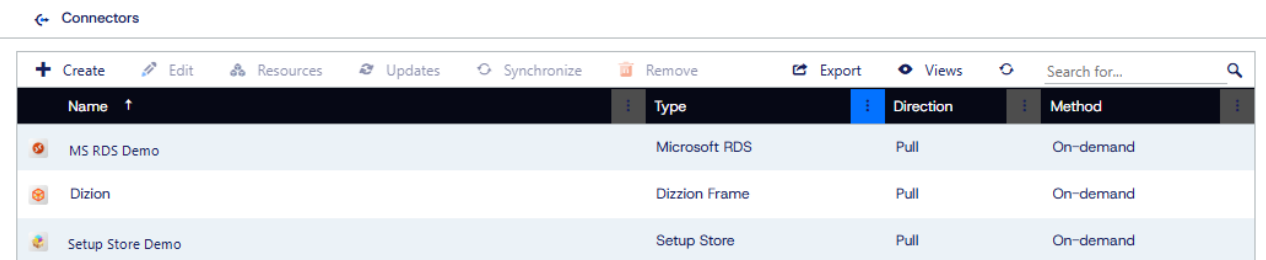

2. As the Connector **Type**, select 'Citrix StoreFront'.

3. Accept the Terms and conditions.

4. Configure settings on the **Overview** and **On-demand** tabs. See [Create a Connector](#) for descriptions of options common to multiple connector types.

5. On the **Settings** tab, choose connector-specific options:

StoreFront settings

- **URL** – Your Citrix StoreFront URL
- **Username** – The username that should be used to connect to your StoreFront server.
- **Password** – The password used in conjunction with the username to connect to Citrix StoreFront.

Package settings

- **Public URL** – The URL used when someone connects through, for example the Citrix ADC. The same store should be specified as with the URL option.
- **Integration** – The following options are available:
 - *Default* – simple integration, where the end user will be directed to the StoreFront website with a launch action embedded in the URL.
 - *Enhanced* – extended integration that require a special script on the StoreFront website which will hide the StoreFront portal when launching an application (with auto closing the tab/popup if possible). The enhanced version of the Citrix connector requires you to install the StoreFront integration script on the StoreFront server. For more information see [Appendix 4 StoreFront integration script](#)
 - *Enhanced (legacy)* – this version is not supported anymore; new connectors cannot use the old enhanced integration.
- **Browser** – The browser that should be used to navigate to the Citrix StoreFront package:
 - *Default* – the URL will be opened by the browser configured as default on devices.
 - *Firefox*
 - *Chrome*
 - *Opera*
 - *Microsoft Edge*
 - *Safari*
 - *Application Workspace* – the URL will be opened using the Application Workspace browser.

Recast

- **Shared authentication session** – Whether or not the session is shared across browsers.
- **Install dependency** – Add an install dependency to the managed packages.

6. Configure additional settings on the **Entitlements** and **Releases** tabs. See [Create a Connector](#) for descriptions of options common to multiple connector types.
